


XDC-3000CL

Digital Cinema Xenon Lamp

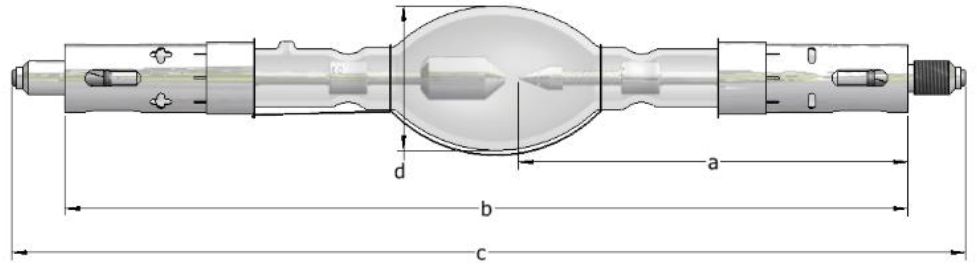

APPLICATIONS

Christie CP2220, CP2230, CP4220, CP4230, CP2000-S,
CP2000-H, CP2000-SB, CP2000-XB, CP2000-ZX

TECHNICAL SPECIFICATIONS

Rated Power	W	3000
Rated Current	A	110
Operating Current Range	A	75-120
Rated Voltage	V	27
Distance a	mm	161.5
Length b	mm	350
Length c (max)	mm	396
Cold arc gap	mm	5.5
Bulb Diameter d	mm	60
Anode (+) Base Diameter	mm	28
Anode Pin Diameter	mm	14
Cathode (-) Base Diameter	mm	28
Cathode Pin Diameter	mm	N/A
Cathode Thread Type		M14 x 1.50
Cable Length e	mm	N/A
Horizontal Operating Position	deg	± 15
Min. Cooling Air Flow Velocity	m/sec	7
Base Surface Temperature (max)	deg C	200

WARRANTY: 1900 hours (100%)



Lighting Technologies International LLC
13700 Live Oak Avenue, Baldwin Park, CA,
USA 91706
www.ltilighting.com

Rev. 3 / 2020
Subject to Change