


XDC-4500CL

Digital Cinema Xenon Lamp

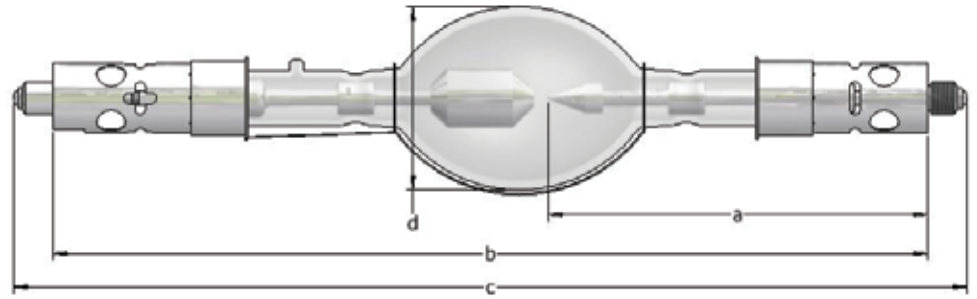

APPLICATIONS

Christie CP2230, CP4230, CP2000-SB, CP2000-S, CP2000-H

TECHNICAL SPECIFICATIONS

Rated Power	W	4500
Rated Current	A	137
Operating Current Range	A	95-140
Rated Voltage	V	33
Distance a	mm	165.5
Length b	mm	381
Length c (max)	mm	415
Cold arc gap	mm	6.0
Bulb Diameter d	mm	80
Anode (+) Base Diameter	mm	30
Anode Pin Diameter	mm	14
Cathode (-) Base Diameter	mm	30
Cathode Thread Type		M14 x 1.50
Cable Length e	mm	None
Horizontal Operating Position	deg	±15
Min. Cooling Air Flow Velocity	m/sec	7
Base Surface Temperature (max)	deg C	200

WARRANTY: 1300 hours (100%)

