


XDC-3001CLX

Digital Cinema Xenon Lamp

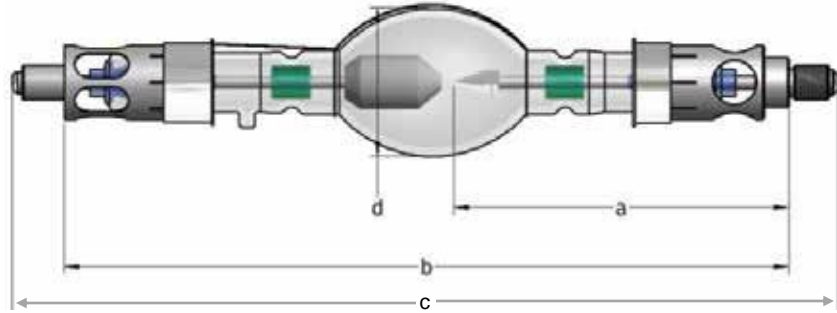

APPLICATIONS

Christie CP2220, CP4220, CP2000-ZX,
CP2420-Xe, CP4420-Xe

TECHNICAL SPECIFICATIONS

Rated Power	W	3000
Rated Current	A	94
Operating Current Range	A	75-100
Rated Voltage	V	32
Distance a	mm	135
Length b	mm	292
Length c (ref.)	mm	333
Cold arc gap	mm	5.2
Bulb Diameter d	mm	60
Anode (+) Base Diameter	mm	30
Anode Pin Diameter	mm	14
Cathode (-) Base Diameter	mm	30
Cathode Thread	mm	M14 x 1.50
Cable Length e	deg	None
Horizontal Operating Position	m/sec	±15
Min. Cooling Air Flow Velocity	deg C	7
Base Surface Temperature (max)		200

WARRANTY: 1200 hours (100%)



**LIGHTING
TECHNOLOGIES**
INTERNATIONAL™

Lighting Technologies International LLC
13700 Live Oak Avenue, Baldwin Park, CA,
USA 91706

www.ltilighting.com

Rev. 05/2023
Subject to Change