


XDC-6000CLX

Digital Cinema Xenon Lamp

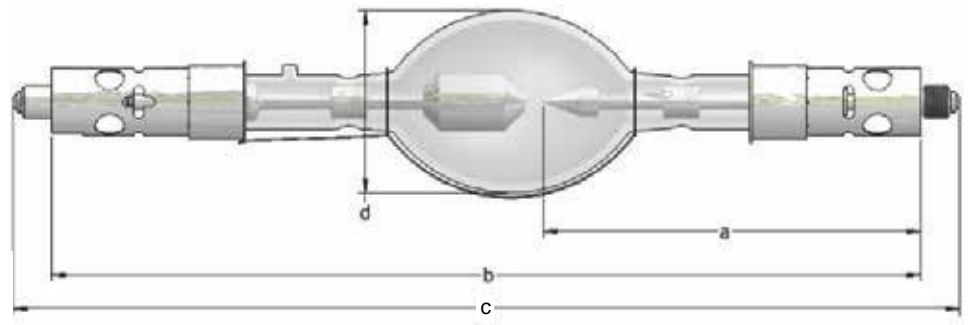

APPLICATIONS

Christie CP2230, CP4230, CP2000-XB
CP2000-S, CP2000-H

TECHNICAL SPECIFICATIONS

Rated Power	W	6000
Rated Current	A	143
Operating Current Range	A	110-150
Rated Voltage	V	42
Distance a	mm	165
Length b	mm	381
Length c (Ref.)	mm	415
Cold arc gap	mm	8.5
Bulb Diameter d	mm	70
Anode (+) Base Diameter	mm	30
Anode Pin Diameter	mm	14
Cathode (-) Base Diameter	mm	30
Cathode Thread	mm	M14 x 1.5
Cable Length e	mm	N/A
Horizontal Operating Position	deg	±15
Min. Cooling Air Flow Velocity	m/sec	7
Base Surface Temperature (max)	deg C	200

WARRANTY: 1000 hours



**LIGHTING
TECHNOLOGIES**
INTERNATIONAL™

Lighting Technologies International LLC
13700 Live Oak Avenue, Baldwin Park, CA,
USA 91706
www.ltilighting.com

Rev. 05/2023
Subject to Change